

LCRW-LED

Construction:

- Steel housing and chassis
- Diffuser is .10 extruded white acrylic


Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**
- Light emits front detail and sides

Notes:

- Keyhole slots top and bottom
- Optional Aluminum construction
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

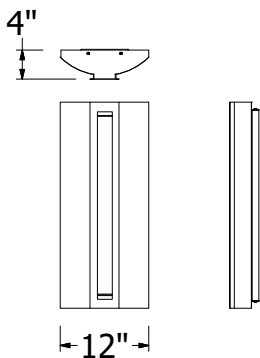

Height - 26" 50"
Width - 12"
Depth - 4"



ORDERING INFORMATION

Example: LCRW-26-LED-U-O2C-4-M13-WSA

LCRW

Size	LED	Watts	Source Lumens	Dimming	Energy Star	Kelvin	Finish	Front Diffuser	Options
						2 3000K 3 3500K 4 4000K	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic SFP Solid Front Panel	DIM LED dimming driver (0 - 10v) 42 All Aluminum Construction
26-LED	O2C	18	2420	0-10v	NO		Optional (See Price List)		
50-LED	O4C29	29	3412	0-10v	NO		M17 Brass Powder		
	O4C	36	4840	0-10v	NO		M20 Tuscan Sun		



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com

