

# MEUW-LED

## Construction:

- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic



## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; Hardware include
- Mounts on a Standard J-Box
- Lens on all five sides
- Optional battery backup available on fixtures 526 & larger
- Optional photocell (21) increases fixture depth 1/2"
- UL and CUL listed **WET** location
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

<b>Type:</b>	
<b>Job Name:</b>	

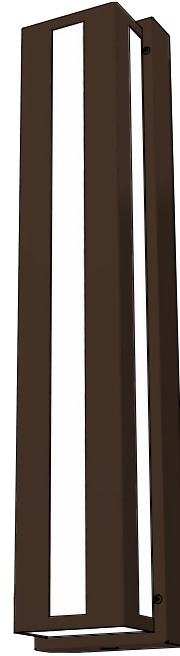

	DIM 'A'	Mount-Center
<b>MEUW-513</b>	13"	6.5"
<b>MEUW-518</b>	18"	9"
<b>MEUW-526</b>	26"	13"
<b>MEUW-538</b>	38"	19"
<b>MEUW-550</b>	50"	25"



## ORDERING INFORMATION

**Example: MEUW-526-LED-O2C-3-Z3-WSA**

## MEUW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K				
<b>513-LED</b>	<b>O1C</b>	9	1210	0-10v	NO					
<b>518-LED</b>	<b>O2A</b>	12	1600	0-10v	NO					
<b>526-LED</b>	<b>O2C</b>	18	2420	0-10v	NO					
<b>538-LED</b>	<b>O3C</b>	27	3630	0-10v	NO					
<b>550-LED</b>	<b>O4C</b>	36	4840	0-10v	NO					
										<b>WSA</b> White Smooth Acrylic
										<b>DIM</b> LED dimming driver (0 - 10v) Dimming to 10% <b>(Included)</b>
										<b>21</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
										<b>42</b> All Aluminum Construction
										<b>Battery Backup Options (MEUW-526 and Larger only)</b> <b>BB10</b> 10 Watts (1170lm) for 90-Minutes



28435 Industry Drive., Valencia, California 91355  
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 www.lightwayind.com • sales@lightwayind.com

