

# MDAW-6xx-LED

## Construction:

- Steel chassis and cage
- Diffuser is impact resistant extruded white acrylic



## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:

- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 3/4"
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

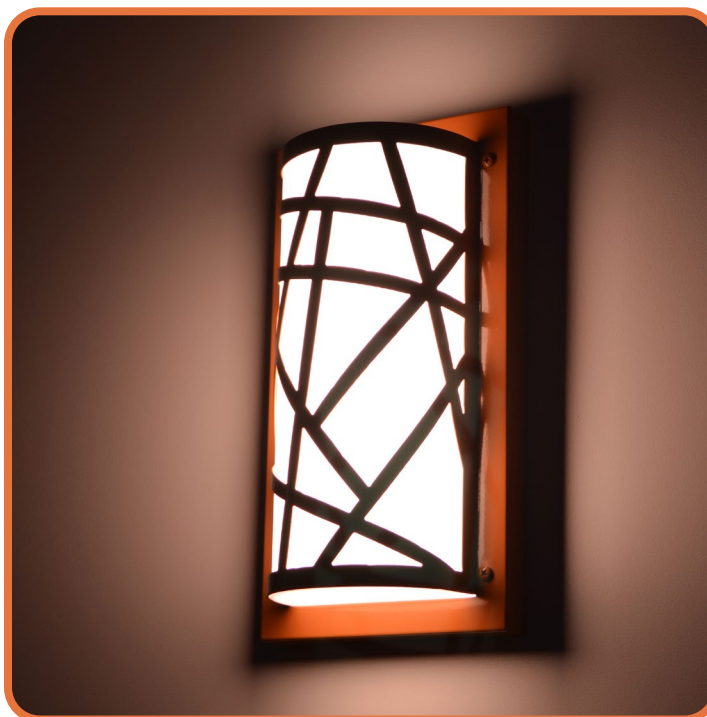

	DIM 'A'	M.C.
<b>MDAW-616</b>	16"	8"
<b>MDAW-626</b>	26"	13"
<b>MDAW-638</b>	38"	19"
<b>MDAW-650</b>	50"	25"



## ORDERING INFORMATION

Example: MDAW-626-LED-O2C-4-Z3-WSA

### MDAW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
<b>616-LED</b>	<b>O1C</b>	9	1210	0-10v	NO	2 3000K 3 3500K 4 4000K 5 5000K	<b>B1</b> Satin Black <b>B2</b> Text Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk White <b>W2</b> Gloss White <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige  <b>Optional</b> (See Price List) <b>M17</b> Brass Powder <b>M16</b> Antique Brass <b>P2</b> Brushed Alum <b>P9</b> Brushed Nickel	<b>WSA</b> White Smooth Acrylic	<b>DIM</b> LED dimming driver (0 - 10v)  <b>21</b> Photocell - <i>See Notes</i> -01 120 volt -02 277 volt  Optional Voltage -347V Input voltage to 347v  <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes	
<b>626-LED</b>	<b>O2C</b>	18	2420	0-10v	NO					
<b>638-LED</b>	<b>O3C</b>	27	3630	0-10v	NO					
<b>650-LED</b>	<b>O4C</b>	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355  
 800-325-4448 / 661-257-0286  
 www.lightwayind.com • sales@lightwayind.com



Revision: 11/14/2024