


MEIW Series



B1 Satin Black



B2 Textured Black




M13 Anodized Silver



T6 Pewter




P9 Brushed Nickel




W13 Pearl Beige



W1 Yolk White



Z1 Satin Bronze



Z3 Textured Bronze




T4 Shimmer Gray



P2 Brushed Aluminum



W3 Textured White



W2 Gloss White



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286
www.lightwayind.com • sales@lightwayind.com



MEIW-LED

Construction:

- Steel housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic
- Accent bars and rings are extruded aluminum

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots left and right
- Top and bottom white acrylic lens - standard
- ADA compliant cage styles A, B and D only
- Not all material and accent styles are available
- Optional lens cover (ALC) eliminates up/down light
- Optional battery backup
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Height - 18" - 20" - 28"

Width - 8 1/2"

Depth - 4" (cage styles A,B and D)

Depth - 4 3/8" (cage style E, F, G and H)

MC - 9 - 10" - 14"

| | |
|-----------|--|
| Type: | |
| Job Name: | |



ORDERING INFORMATION

Example: MEIW-818-LED-A-O1C-4-M16-WSA-M-EC

MEIW

| Size | LED | | | | | Kelvin | Cage | Finish | Diffuser | Options |
|---------|-----|-------|---------------|---------|-------------|-------------------------------|--------------------------------------|---|--|---|
| | | Watts | Source Lumens | Dimming | Energy Star | 2 3000K 3 3500K 4 4000K | A B D E F G H X | B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder P2 Brushed Alum P9 Brushed Nickel | WSA White Smooth Acrylic Optional Cage Accents (See Page 2) Material S Solid P Perforated Screen M Wire Mesh W Waffle Pattern Style SC Screen Complete CC Center Complete EC Ends Complete CH Center Half OX Custom | DIM LED dimming driver (0 - 10v) 21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt ALC Aluminum Lens Cover - See Notes 39 J-Box with knockouts on all sides Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes |
| 818-LED | O1C | 9 | 1210 | 0-10v | NO | | | | | |
| 820-LED | O2A | 12 | 1600 | 0-10v | NO | | | | | |
| 828-LED | O2C | 18 | 2420 | 0-10v | NO | | | | | |




28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286
www.lightwayind.com • sales@lightwayind.com




MEIW Series


Cage Styles and Accents

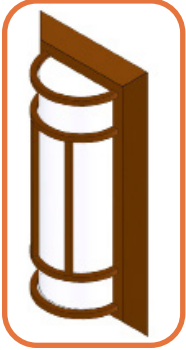


MEIW-A

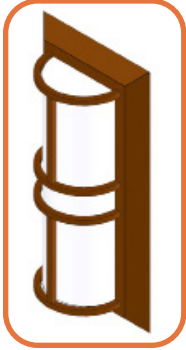


MEIW-B

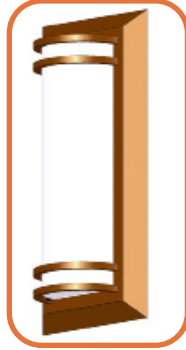


MEIW-D

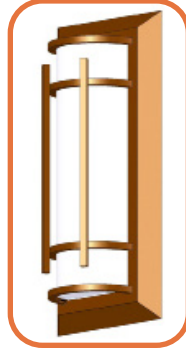


MEIW-E

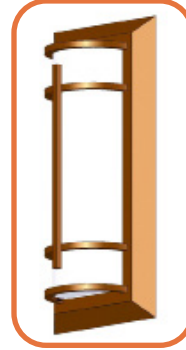


MEIW-F

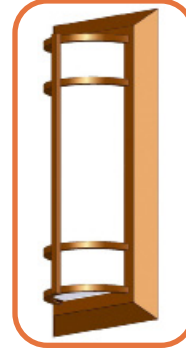


MEIW-G

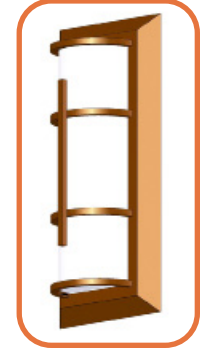


MEIW-H

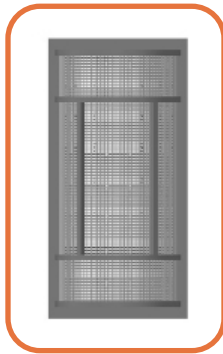


SC
Screen
Complete

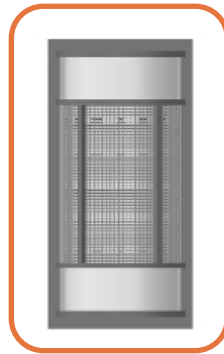

CC
Center
Complete

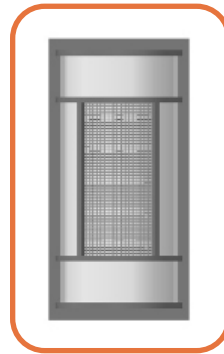


CH
Center
Half

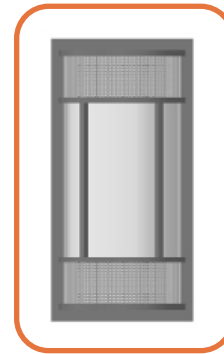


EC
Ends
Complete




Solid



Mesh



Perforated



Waffle



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286
www.lightwayind.com • sales@lightwayind.com

