

MEUW-LED

Construction:

- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic



Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; Hardware include
- Mounts on a Standard J-Box
- Lens on all five sides
- Optional battery backup available on fixtures 526 & larger
- Optional photocell (21) increases fixture depth 1/2"
- UL and CUL listed **WET** location
 - Build America, Buy America Act Compliant
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

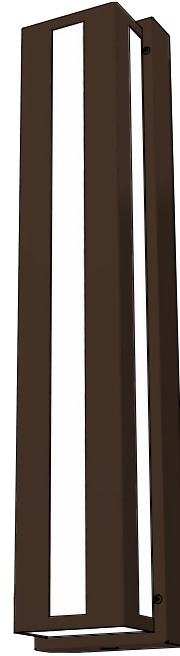

	DIM 'A'	Mount-Center
MEUW-513	13"	6.5"
MEUW-518	18"	9"
MEUW-526	26"	13"
MEUW-538	38"	19"
MEUW-550	50"	25"



ORDERING INFORMATION

Example: MEUW-526-LED-O2C-3-Z3-WSA

MEUW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
513-LED	O1B	8	1000	0-10v	NO	2 3000K 3 3500K 4 4000K		B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) P2 Brushed Alum	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included) 21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt 42 All Aluminum Construction Battery Backup Options (MEUW-526 and Larger only) BB10 10 Watts (1170lm) for 90-Minutes
518-LED	O2A	12	1600	0-10v	NO					
526-LED	O2C	18	2420	0-10v	NO					
538-LED	O3C	27	3630	0-10v	NO					
550-LED	O4C	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com

