





B1 Satin
Black



B2 Textured
Black



M13 Anodized
Silver




T6 Pewter




W13 Pearl
Beige



W1 Yolk White




Z1 Satin
Bronze



Z3 Textured
Bronze



T4 Shimmer
Gray



W3 Textured
White



W2 Gloss
White



FWLA-LED

Construction:

- Aluminum housing and chassis
- Diffuser is Clear Smooth Acrylic of optional White Frosted Acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- ½" NPT knuckle mounts to junction box or ground fitter
- Photocell (21) – specify voltage 120v or 277v
- FWLA-24 and 48 come standard with (2) knuckles – use option 3K for additional knuckle
- FWLA-96 and 144 standard with (3) knuckles – use option 4K for additional knuckle
- Optional battery backup
- Extension arms are powder coated silver/gray with P3 finish; otherwise painted same color as housing
- UL and CUL listed **WET** location
- Build America, Buy America Act Compliant
- LED Components
 - Replaceable Module
 - CRI > 90
 - >70,000 hours = 80,000
 - Voltage 120 - 208 - 240 - 277
 - 5-Year Warranty on LED Components

Type:

Job Name:



FWLA-24

Height - 5"
Width - 24½"
Depth - 7"

FWLA-48

Height - 5"
Width - 48½"
Depth - 7"

FWLA-96

Height - 5"
Width - 96½"
Depth - 7"

FWLA-144

Height - 5"
Width - 144½"
Depth - 7"

ORDERING INFORMATION

Example: FWLA-96-LED-O8C-4-P3-CSA-25

FWLA

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
24-LED	O2C	18	2420	0-10v	NO	2 3000K 3 3500K 4 4000K 5 5000K		P3 Clear Anodized Aluminum	CSA Clear Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
48-LED	O4C	36	4840	0-10v	NO			Optional (See Price List)	Optional (See Price List)	21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
96-LED	O8C	72	9680	0-10v	NO			Optional (See Price List)	Optional (See Price List)	24 24" Extension Arms (FWLA-24 & 48) 25 24" Extension Arms (FWLA-96 & 144)
144-LED	O6F	58	6600	0-10v	NO			Optional (See Price List)	Optional (See Price List)	84 Ground Fitter
	O12C	107	14520	0-10v	NO			Optional (See Price List)	Optional (See Price List)	3K (3) Knuckles 4K (4) Knuckles TM Trunion Mount FH Fixed Hood
								W1 Yolk W2 Gloss White W3 Text White B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WFA White Frosted Acrylic	Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minute



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com



Extension Arms -24/-25

Type:	
Job Name:	





Notes:

- Ridge galvanized 24" long x 1/2" conduit pipe
- Threaded end with coupling on oppsite end
- Powder coated finish to match fixture
- Attaches to Waterproof electrical box (supplied by others)
- Sold in sets of (2) or (3)
- Continues UL listing



Option 24

Option 25

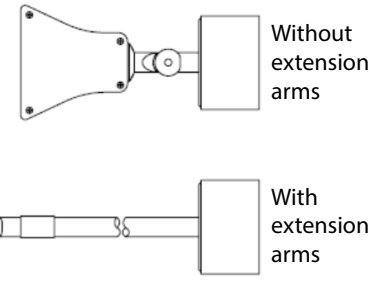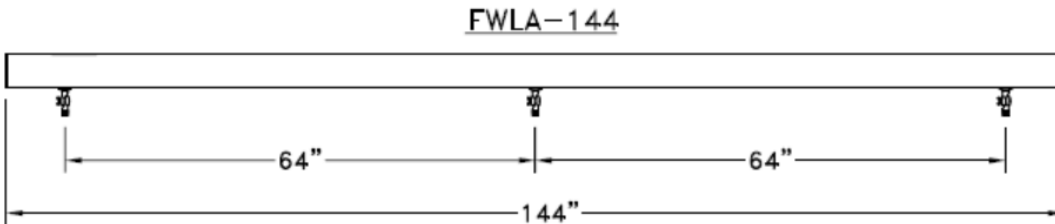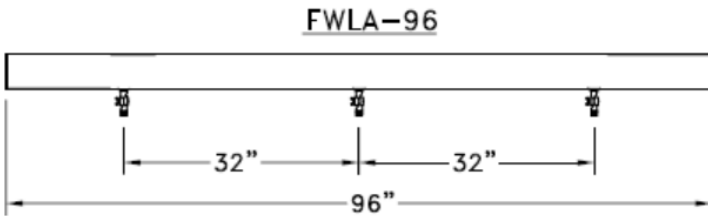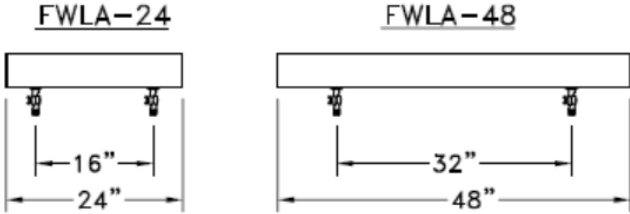

ORDERING INFORMATION

Model	Discription
-24	Set of (2) 24" extension arms painted to match fixture
-25	Set of (3) 24" extension arms painted to match fixture
Contact factory to verify available length options	



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 www.lightwayind.com • sales@lightwayind.com




Ground Fitter -84

Type:

Job Name:

Notes:

- 18" Mount Stake for 6" Diameter x 8 1/2" High
- Accepts 1/2" threaded knuckle (supplied by others)
- Built in wiring compartment
- Adjustable stabilizer
- Angled bottom to eliminate cable congestion
- 100% shatter resistant
- Corrosion and UV resistant
- UL Listed
- Suitable for WET locations

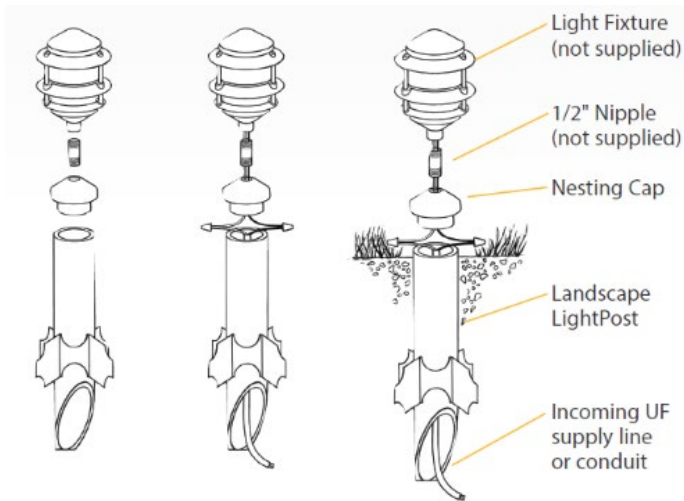

ORDERING INFORMATION

	Discription	Direct Buried	Anchor Bolts	Finish	Options
-84	18" Ground Fitter Stake Black	Yes	N/A	B99 Black	



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 www.lightwayind.com • sales@lightwayind.com

